



The Katiba Post-top is a modern twist on the LED post-top range. With its aesthetic looks and great performance, the Katiba is the perfect addition to any installation where form and function are both important attributes.



General Data


Housing	Die-cast aluminum spigot, Polycarbonate lid
Diffuser	Acrylic (impact resistant)
Surge protection	10kV/kA 20kV/kA optional
Housing finish	Powder coated or raw aluminium
Spigot entry	76mm Bottom entry
Spigot entry depth	120mm
Nominal Voltage	198V - 240V 50/60Hz
Operating temperature	-35 °C to + 50 °C

Technical Data

Full product name	Luminous Flux	Efficacy	Weight	LED Lifetime
Katiba 30W LED Post-Top	4840	161lm/w	4kg	50,000hrs
Katiba 40W LED Post-Top	5610	140lm/w	4kg	50,000hrs
Katiba 50W LED Post-Top	7220	144lm/w	4kg	50,000hrs
Katiba 55W LED Post-Top	7578	137lm/w	4kg	50,000hrs
Katiba 60W LED Post-Top	8020	133lm/w	4.1kg	50,000hrs
Katiba 70W LED Post-Top	8230	117lm/w	4.7kg	50,000hrs
Katiba 80W LED Post-Top	9112	113lm/w	5.2kg	50,000hrs

*All specifications are indicative only and could differ from final product


Polar curve

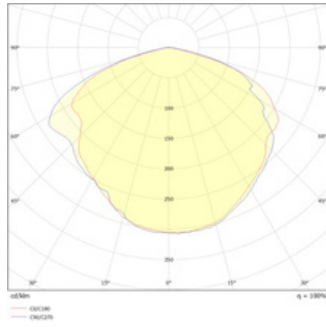

Ordering Data (*optional)


Colours:	Grey / Black / Green / Unpainted with Grey lid
CCT:	*3000K / 4000K / *5000K / *5500K
Features	IP65 / Removable Gear-tray for ease of maintenance and retrofits
Installation:	3m to 8m pole top / Wall mounted bracket
Accessories:	Wall mounted bracket, pedestal mount
Applications:	Roadway lighting / Perimeter lighting / Security / Parks / Suburban roads

Dimensions

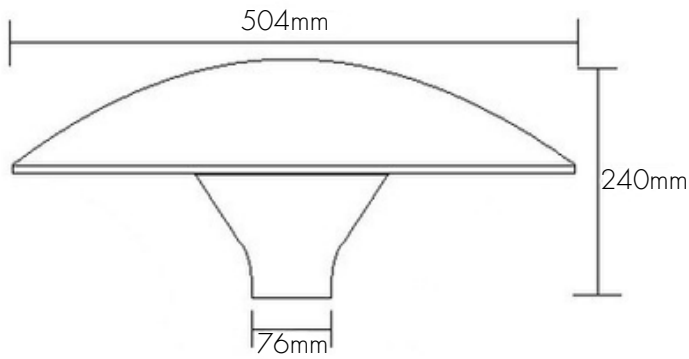

Mounting instructions

- Ensure that the power has been disconnected from the pole
- Remove existing fitting if present
- Connect the 220V incoming line to the supplied "pigtail"
- Slip the luminaire over the pole
- Tighten the grub screws to no more than 9 nm
- Test the luminaire to ensure that it is functioning correctly
- **NB - This luminaire must be installed by an accredited and qualified electrician**

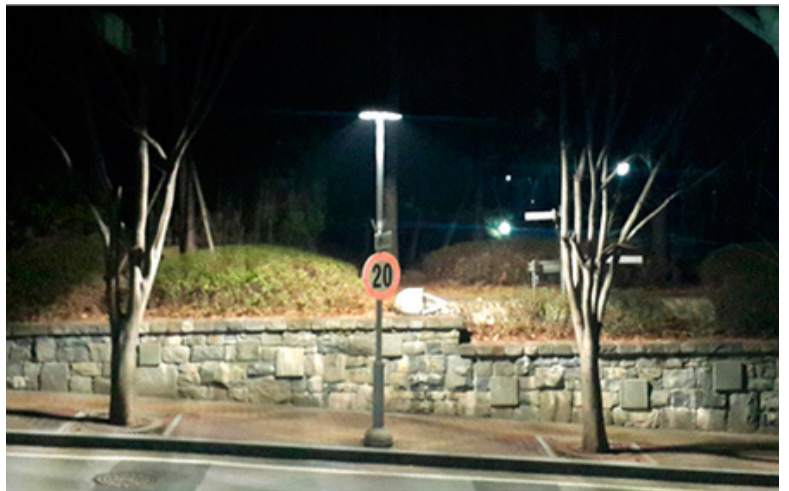

Locally manufactured *the images shown are for illustration purposes only and may not be an exact representation of the final product. 5 Year warranty (terms and conditions apply)