



As an IP65 Luminaire, the Tait is well suited for perimeter lighting around residential and commercial buildings, staircase and outdoor canopies, serving as illumination for pedestrians.



## General Data


Housing	LM6 Die cast aluminium (EN 1706 AC-44100)
Diffuser	Opal acrylic diffuser
Surge protection	10kV/kA                      20kV/kA optional
Housing finish	Powder coated
Mounting	Surface
Mounting fasteners	Not included
Nominal Voltage	198V - 240V 50/60Hz
Operating temperature	-35 °C to + 50 °C

## Technical Data

Full product name	Luminous Flux	Efficacy	Weight	LED Lifetime
Tait 15W LED Bulkhead	1411	94lm/w	2.36kg	100,000hrs
Tait 20W LED Bulkhead	1903	95lm/w	2.36kg	100,000hrs

\*All specifications are indicative only and could differ from final product

# Polar curves

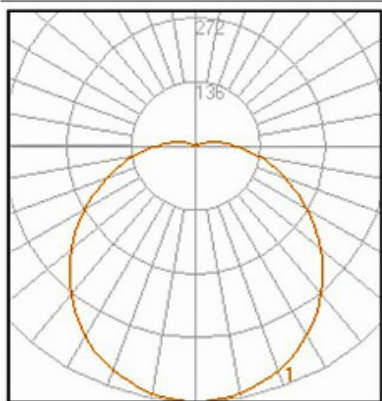

## Ordering Data (\*optional)

Colours: Black / White

CCT: \*3000K / 4000K / \*5000K / \*5500K


Features: IP65 / Tamper proof / Impact resistant diffuser

Installation: Surface

Accessories: Battery back-up 1 or 3 hours maintained at 20% output.

Applications: Walls / Ceilings / Commercial / Residential / Industrial

## Dimensions

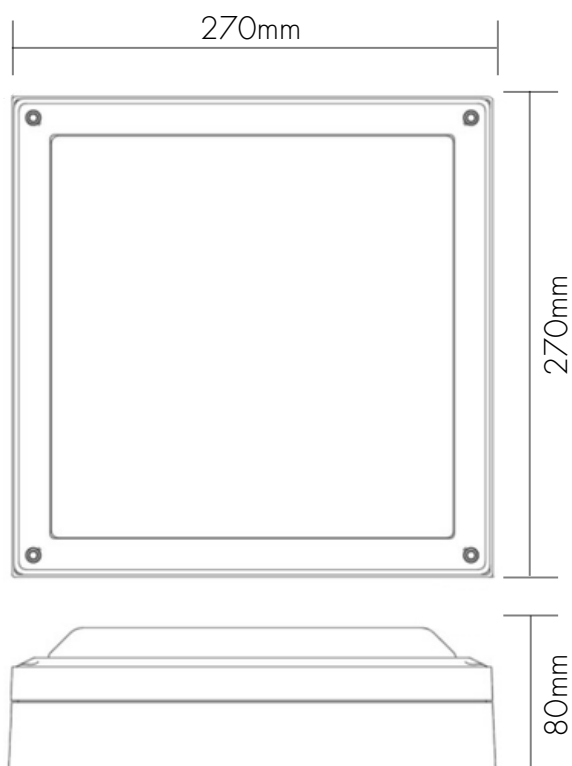

## Mounting instructions

- Ensure that the power has been disconnected
- Remove existing fitting if present
- Connect the 220V incoming line to the supplied "pigtail"
- Mount the luminaire to the surface
- Tighten the fasteners to no more than 9 nm
- Test the luminaire to ensure that it is functioning correctly
- **NB - This luminaire must be installed by an accredited and qualified electrician**

Locally manufactured \*the images shown are for illustration purposes only and may not be an exact representation of the final product. 5 Year warranty (terms and conditions apply)