


The Delos is a modern architectural luminaire designed to combine refined aesthetics with high-performance illumination. Featuring a sleek angular profile and minimalist form, Delos enhances contemporary outdoor environments while delivering reliable, functional lighting for pathways, public spaces, commercial developments, and landscaped areas.

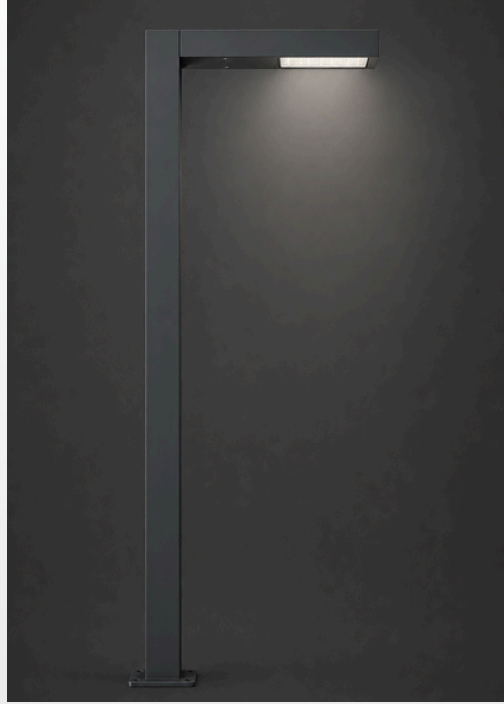

## General Data

Housing	Aluminium		
Diffuser	IP-68 Optics		
Surge protection	10kV/kA	20kV/kA optional	
Housing finish	Powder coated		
Mounting	Surface, plinth or planted		
Mounting type	Planted 600mm, plinth with bolt cage, surface with bolt cage		
Nominal Voltage	198V - 240V 50/60Hz		
Operating temperature	-15 °C to + 50 °C		
Height planted	3,6m/5,6m/6,6m		
Height surface mounted	3m/5m/6m		




## Technical Data

Full product name	Luminous Flux	Efficacy	Weight	LED Lifetime
Delos 30W LED Planted/Surface	5040	168lm/w	24kg	50,000hrs
Delos 48W LED Planted/Surface	7872	164lm/w	24kg	50,000hrs
Delos 55W LED Planted/Surface	8360	152lm/w	24kg	50,000hrs
Delos 68W LED Planted/Surface	9724	143lm/w	26kg	50,000hrs
Delos 80W LED Planted/Surface	10,960	137lm/w	29kg	50,000hrs


## Ordering Data (\*optional)

Colours:	Grey / Black
CCT:	*3000K / 4000K / *5000K / *5500K
Features:	IP66 / Removable Gear-tray for ease of maintenance
Applications:	Roadway lighting / Perimeter lighting / Security / Parks / Suburban roads

Surface mounted

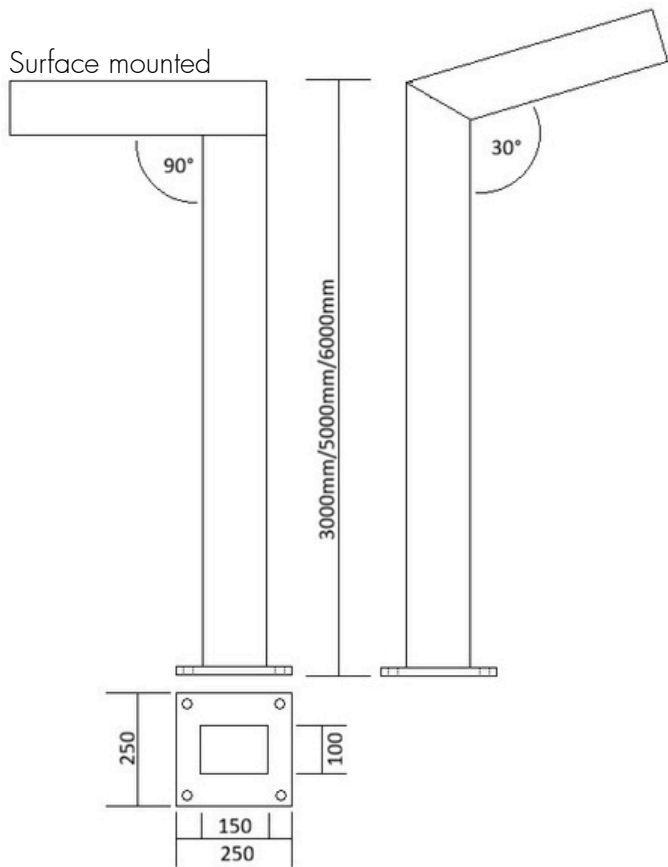

Planted

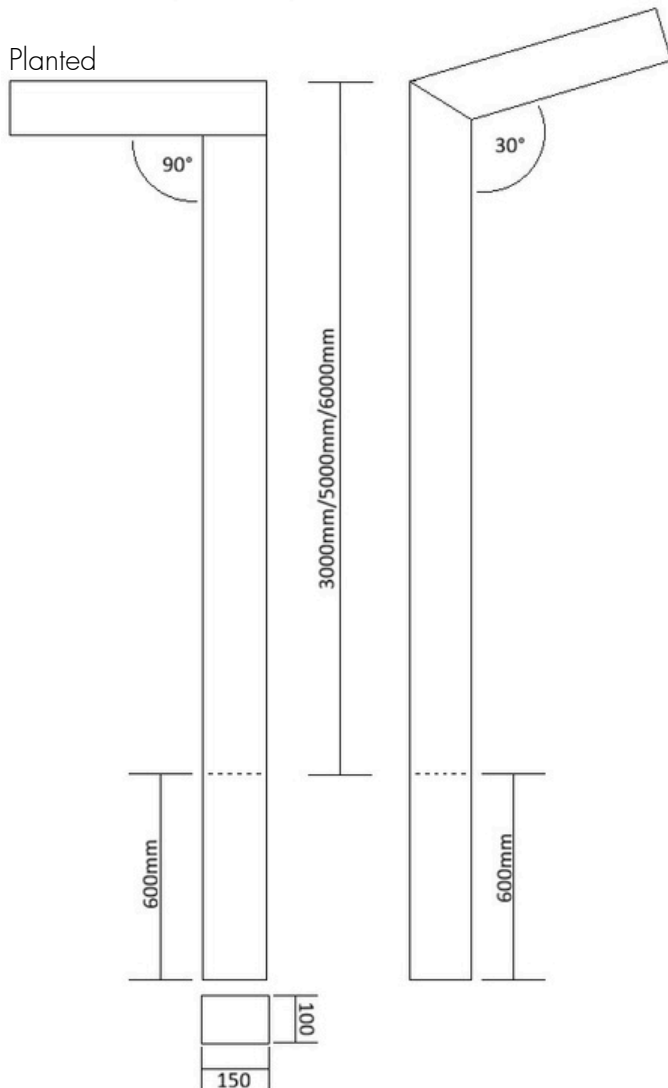

Mounting instructions

- Ensure that the power has been disconnected from the pole
- Connect the 220V incoming line to the supplied "pigtail"
- Slip the luminaire over the pole
- Test the luminaire to ensure that it is functioning correctly
- **NB - This luminaire must be installed by an accredited and qualified electrician**

Locally manufactured \*the images shown are for illustration purposes only and may not be an exact representation of the final product. 5 Year warranty (terms and conditions apply)