

Designed for medium installations, the Katiba Highbay is a great solution for industrial, commercial and manufacturing installations.



General Data

Housing	Polycarbonate body	
Diffuser	Acrylic (impact resistant)	
Surge protection	10kV/kA	20kV/kA optional
Housing finish	Grey / Black Poly	
Mounting	Suspended	
Height	5 to 20m	
Nominal Voltage	198V - 240V 50/60Hz	
Operating temperature	-35 °C to + 50 °C	


Technical Data

Full product name

Katiba 30W LED Post-Top	4840	161lm/w	4kg	50,000hrs
Katiba 40W LED Post-Top	5610	140lm/w	4kg	50,000hrs
Katiba 50W LED Post-Top	7220	144lm/w	4kg	50,000hrs
Katiba 55W LED Post-Top	7578	137lm/w	4kg	50,000hrs
Katiba 60W LED Post-Top	8020	133lm/w	4.1kg	50,000hrs
Katiba 70W LED Post-Top	8230	117lm/w	4.7kg	50,000hrs
Katiba 80W LED Post-Top	9112	113lm/w	5.2kg	50,000hrs

*All specifications are indicative only and could differ from final product

Polar curves

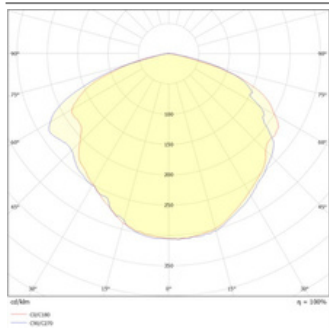

Ordering Data (*optional)

Colours: Grey

CCT: *3000K / 4000K / *5000K / *5500K


Features: IP65

Installation: Suspended 5m to 20m

Accessories: *Dimming control

Applications: Commercial / Industrial

Dimensions

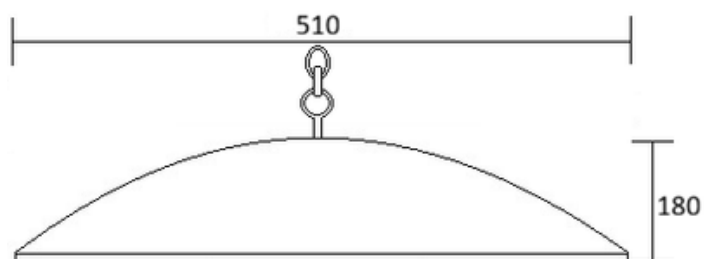

Mounting instructions

- Ensure that the power has been disconnected
- Remove existing fitting if present
- Connect the 220V incoming line to the supplied "pigtail"
- Mount the luminaire to the surface
- Tighten the fasteners to no more than 9 nm
- Test the luminaire to ensure that it is functioning correctly
- **NB - This luminaire must be installed by an accredited and qualified electrician**

Locally manufactured *the images shown are for illustration purposes only and may not be an exact representation of the final product. 5 Year warranty (terms and conditions apply)